

# Specifications

		XJ-S57/47/37	XJ-S52/42/32	XJ-SC215	XJ-SC210
Brightness(lumens)*	Eco-Mode: OFF	3000/2700/2300 lumens	3000/2700/2300 lumens	2500 lumens	2500 lumens
Contrast ratio*	Telephoto mode	1800:1	1800:1	1800:1	1800:1
Lamp	High-pressure mercury lamp	210W	210W	210W	210W
Estimated Lamp life		Up to 2,000 hours	Up to 2,000 hours	Up to 2,000 hours	Up to 2,000 hours
Keystone correction	Auto	+30°	+30°	+30°	+30°
	Manual	±30°	±30°	±30°	±30°
Projection lens		2X Power Zoom and Focus	2X Power Zoom and Focus	2X Power Zoom and Focus	2X Power Zoom and Focus
Projection screen size		15 ~ 300-inch	15 ~ 300-inch	15 ~ 300-inch	15 ~ 300-inch
Projection range	60-inch screen	1.7m to 3.4m	1.7m to 3.4m	1.7m to 3.4m	1.7m to 3.4m
	100-inch screen	2.8m to 5.6m	2.8m to 5.6m	2.8m to 5.6m	2.8m to 5.6m
	Minimum	0.84m	0.84m	0.84m	0.84m
Projection system		DLP® system	DLP® system	DLP® system	DLP® system
Display element	Device Type	0.55-inch DLP® chip	0.55-inch DLP® chip	0.55-inch DLP® chip	0.55-inch DLP® chip
	Native Resolution	XGA (1024 × 768) 786,432 pixels	XGA (1024 × 768) 786,432 pixels	XGA (1024 × 768) 786,432 pixels	XGA (1024 × 768) 786,432 pixels
Computer Signal Compatibility	Maximum	UXGA (1600 × 1200) (Compressed)	UXGA (1600 × 1200) (Compressed)	UXGA (1600 × 1200) (Compressed)	UXGA (1600 × 1200) (Compressed)
	Resolutions	SVGA, XGA, WXGA, SXGA, SXGA+, WXGA+, WSXGA+, UXGA	SVGA, XGA, WXGA, SXGA, SXGA+, WXGA+, WSXGA+, UXGA	SVGA, XGA, WXGA, SXGA, SXGA+, WXGA+, WSXGA+, UXGA	SVGA, XGA, WXGA, SXGA, SXGA+, WXGA+, WSXGA+, UXGA
	Hor./Vert. Frequency	fH 31.5-91.1 kHz / fV 56-85 Hz	fH 31.5-91.1 kHz / fV 56-85 Hz	fH 31.5-91.1 kHz / fV 56-85 Hz	fH 31.5-91.1 kHz / fV 56-85 Hz
Video Signal Compatibility	Video Systems	NTSC/PAL/PAL-N/PAL-M/PAL60/SECAM	NTSC/PAL/PAL-N/PAL-M/PAL60/SECAM	NTSC/PAL/PAL-N/PAL-M/PAL60/SECAM	NTSC/PAL/PAL-N/PAL-M/PAL60/SECAM
	DTV/HDTV	480i/480P/576i/576P/720P/1080i/1080p	480i/480P/576i/576P/720P/1080i/1080p	480i/480P/576i/576P/720P/1080i/1080p	480i/480P/576i/576P/720P/1080i/1080p
Color reproduction		Full color (16.77 million colors)	Full color (16.77 million colors)	Full color (16.77 million colors)	Full color (16.77 million colors)
Power source		AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power consumption	Operating	270W (Eco-Mode:220W)	270W (Eco-Mode:220W)	270W (Eco-Mode:220W)	270W (Eco-Mode:220W)
	Standby	1.2W (100-120V), 1.8W (220-240V)	1.2W (100-120V), 1.8W (220-240V)	1.2W (100-120V), 1.8W (220-240V)	1.2W (100-120V), 1.8W (220-240V)
Usage environment	Operating temperature	41-95°F (5-35°C)	41-95°F (5-35°C)	41-95°F (5-35°C)	41-95°F (5-35°C)
	Operating humidity	20-80% (non-condensation)	20-80% (non-condensation)	20-80% (non-condensation)	20-80% (non-condensation)
	High Altitude Mode	Yes (for operation 1500m above sea level)	Yes (for operation 1500m above sea level)	Yes (for operation 1500m above sea level)	Yes (for operation 1500m above sea level)
<b>Interface Terminals</b>					
RGB/Component Video Input		mini D-Sub 15 pin x 1 Also use as YcbCr/YPbPr input	mini D-Sub 15 pin x 1 Also use as YcbCr/YPbPr input	mini D-Sub 15 pin x 1 Also use as YcbCr/YPbPr input	mini D-Sub 15 pin x 1 Also use as YcbCr/YPbPr input
Audio	Input	3.5mm mini-jack	3.5mm mini-jack	3.5mm mini-jack	3.5mm mini-jack
	Output	1 W speaker 3.5mm mini-jack (shared with Audio Input)	1 W speaker 3.5mm mini-jack (shared with Audio Input)	1 W speaker 3.5mm mini-jack (shared with Audio Input)	1 W speaker 3.5mm mini-jack (shared with Audio Input)
Video	Input terminals	Composite: 3.5mm mini-jack (sharing audio terminal), YCbCr/YPbPr	Composite: 3.5mm mini-jack (sharing audio terminal), YCbCr/YPbPr	Composite: 3.5mm mini-jack (sharing audio terminal), YCbCr/YPbPr	Composite: 3.5mm mini-jack (sharing audio terminal), YCbCr/YPbPr
Control	Terminal	RS-232C Adapter cable (YK-5:option) required and sold separately	RS-232C Adapter cable (YK-5:option) required and sold separately	RS-232C Adapter cable (YK-5:option) required and sold separately	RS-232C Adapter cable (YK-5:option) required and sold separately
USB		TypeA x 1, USB (1.1) Host	TypeA x 1, USB (1.1) Host	TypeA x 1, USB (1.1) Host	TypeA x 1, USB (1.1) Host
	Connectable Equipment	Wireless (IEEE802.11b) Adapter YW-2L	Wireless (IEEE802.11b) Adapter YW-2L	Wireless (IEEE802.11b) Adapter YW-2L	Wireless (IEEE802.11b) Adapter YW-2L
		Multi-functional camera system YC-400/430	Multi-functional camera system YC-400/430	Multi-functional camera system YC-400/430	Multi-functional camera system YC-400/430
		USB memory (commercially available)	USB memory (commercially available)	USB memory (commercially available)	USB memory (commercially available)
<b>Others</b>					
Dimensions		270 × 199 × 43mm Including projections (32mm at thinnest point)	270 × 199 × 43mm Including projections (32mm at thinnest point)	270 × 199 × 43mm Including projections (32mm at thinnest point)	270 × 199 × 43mm Including projections (32mm at thinnest point)
Weight		1.8kg	1.8kg	1.8kg	1.8kg
Limited Warranty**		2 years, 180 days or 500 hours (whichever comes first) lamp warranty	2 years, 180 days or 500 hours (whichever comes first) lamp warranty	2 years, 180 days or 500 hours (whichever comes first) lamp warranty	2 years, 180 days or 500 hours (whichever comes first) lamp warranty
Security compatibility	Kensington compatible	Yes	Yes	Yes	Yes
	Power ON password	Yes	Yes	Yes	Yes
Ceiling mount		Yes	Yes	Yes	Yes
Full Function IR Remote Control		Yes	Yes	Yes	Yes
Remote controller range		5.0m maximum	5.0m maximum	5.0m maximum	5.0m maximum
Included Accessories		Wireless remote controller (YT-35), RGB cable, AV cable, AC Power Cord, Projector Soft Case, Accessory Soft Case, Manual on CD-ROM	Wireless remote controller (YT-35), RGB cable, AV cable, AC Power Cord, Projector Soft Case, Accessory Soft Case, Manual on CD-ROM	Wireless remote controller (YT-35), RGB cable, AV cable, AC Power Cord, Projector Soft Case, Accessory Soft Case, Manual on CD-ROM	Wireless remote controller (YT-35), RGB cable, AV cable, AC Power Cord, Projector Soft Case, Accessory Soft Case, Manual on CD-ROM
Optional Accessories		Replacement Lamp ( Part # YL-3A)	Replacement Lamp ( Part # YL-3A)	Replacement Lamp ( Part # YL-4A)	Replacement Lamp ( Part # YL-4A)
		RS-232C adapter (Part # YK-5)	RS-232C adapter (Part # YK-5)	RS-232C adapter (Part # YK-5)	RS-232C adapter (Part # YK-5)
		Wireless Adapter with Software (Part # YW-2L)	Wireless Adapter with Software (Part # YW-2L)		

\*Compliance with ISO21118-2005 \*\* see Warranty Statement included with Product for complete details

# CASIO



**XJ - S57/52 - 3000 ANSI Lumens**

**XJ - S47/42 - 2700 ANSI Lumens**

**XJ - S37/32 - 2300 ANSI Lumens**

**XJ - SC215/210 - 2500 ANSI Lumens**

**SUPER SLIM  
PROJECTOR**


**THINNEST POINT 32mm**

**CASIO**

Visit: [www.casioportable.com](http://www.casioportable.com)

CASIO is a registered trademark of CASIO Computer Co., Ltd. in Japan. DLP, the DLP logo and the DLP medallion are trademarks of Texas Instruments. XGA is a registered trademark of International Business Machines Corporation in the United States. Other product names or company names on this specification brochure are either trademarks or registered trademarks of their respective owners. Specifications subject to change without notice.



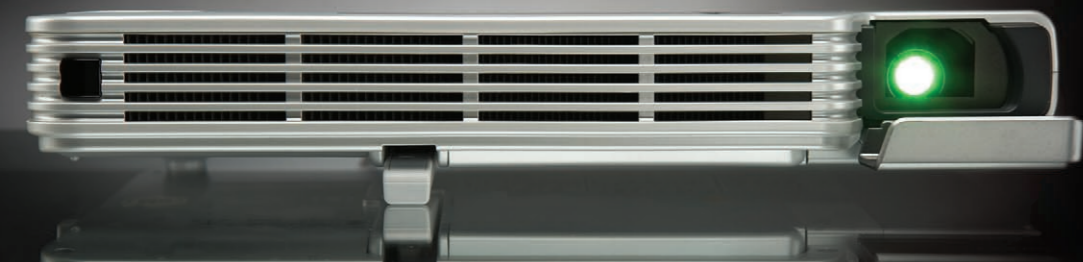

## XJ-S57/52/47/42/37/32

New models XJ-S57/52/47/42/37/32 are classified as higher lumens series of Super Slim projector. This series maintains the features expected from a Super Slim projector while boasting a 3000~2300 ANSI Lumens light output. Small and bright enough for the road warrior, the 2x Short throw power zoom lens and RS-232C control functionality are ideal for Conference or Classrooms where brightness is an important feature.

### Standard Features For All Models:

- XGA (1024 × 768) Resolution
- DLP Technology
- 1800:1 Contrast Ratio



### All Models Include:

- Remote Control
- Storage Case for Projector and Cables
- Cables for PC, Power, Video Adapter

### RS-232C Control Connectivity

No more compromising. Casio's New Super Slim projectors now incorporate RS-232C control for easy system integration. The Super Slim's low profile and elegant design looks great in any Boardroom Conference or Classroom. Compatible with industry standard control systems the Super Slim projectors boast an available command set which includes Power On/Off, Input select and Lens Zoom and Focus.



It is 1.8kg. and about the size of an B5 size of paper. At 43mm thick it is designed to slide into your briefcase with your laptop.



Computer Cable (Included)



Remote Control (Included)



RS-232C Adapter YK-5 (Option)



Ceiling Projection

### Computer / Component Video Input (All Models)

Connect to computers and HD video (480i / 480P / 576i / 576P / 720P / 1080i / 1080P) sources.



- 1-Watt Speaker
- Infrared
- Computer
- RS-232C (Adapter Cable : Option)
- AV Composite Video + audio (Adapter Cable Included)

### USB Technology Models XJ-S57/47/37 and XJ-SC215

**Casio's EZ-Converter PRO**  
Software is included to convert Microsoft® Powerpoint, Word and more.



**Wireless Presentations**  
By using the optional YW-2L Wireless LAN adaptor, up to four laptops can be connected wirelessly.

**PC Free Presentations**  
No laptop required – Transfer your material to a USB thumb drive by using Casio's EZ-Converter PRO software.

### Models:

- XJ-S57 - 3000 ANSI Lumens - USB Technology
- XJ-S52 - 3000 ANSI Lumens
- XJ-S47 - 2700 ANSI Lumens - USB Technology
- XJ-S42 - 2700 ANSI Lumens

- XJ-S37 - 2300 ANSI Lumens - USB Technology
- XJ-S32 - 2300 ANSI Lumens
- XJ-SC215 - 2500 ANSI Lumens - USB Technology
- XJ-SC210 - 2500 ANSI Lumens

## XJ-SC215 and XJ-SC210

Both XJ-SC215 and XJ-SC210 are classified as superior image quality series, which light engine algorithm and improved multi-segment color wheel have expanded the chromaticity region by approximately 10% producing superior color reproduction. Color accuracy and brightness are maintained providing an ideal projection solution for users who require the best color reproduction. Whether it's a conference room installation or you are on the road, this series ensure you the best performance.

### Short Throw Power Zoom and Focus Lens

Whether you are in a small office or a large boardroom the Super Slim's 2X power zoom lens gives you the flexibility to easily position the projector. Large screen projection is possible in any room and the short throw lens (1.4-2.8 throw ratio) can project an image from as close as 0.9m and up to 8.5m back. Image adjustment can be easily made from the remote control or via an RS-232C control system.



### Screen Size Diagonal

Screen Size (inch)	Wide (m)	Tele (m)
15	—	0.84
40	1.1	2.2
60	1.7	3.4
80	2.3	4.5
100	2.8	5.6
150	4.3	8.5
200	5.7	11.3
300	8.6	—

\*Projection distances are rough indications for reference during installation.



### Casio Multi-Functional Camera System YC-430

Allows easy projection of actual objects such as documents or product samples. The 10 Mega Pixel CCD camera is easy to remove from the stand. (Optional & Sold Separately)

Visit: [www.casioportable.com](http://www.casioportable.com)

**CASIO**

